



ORIENTATION
FRONT

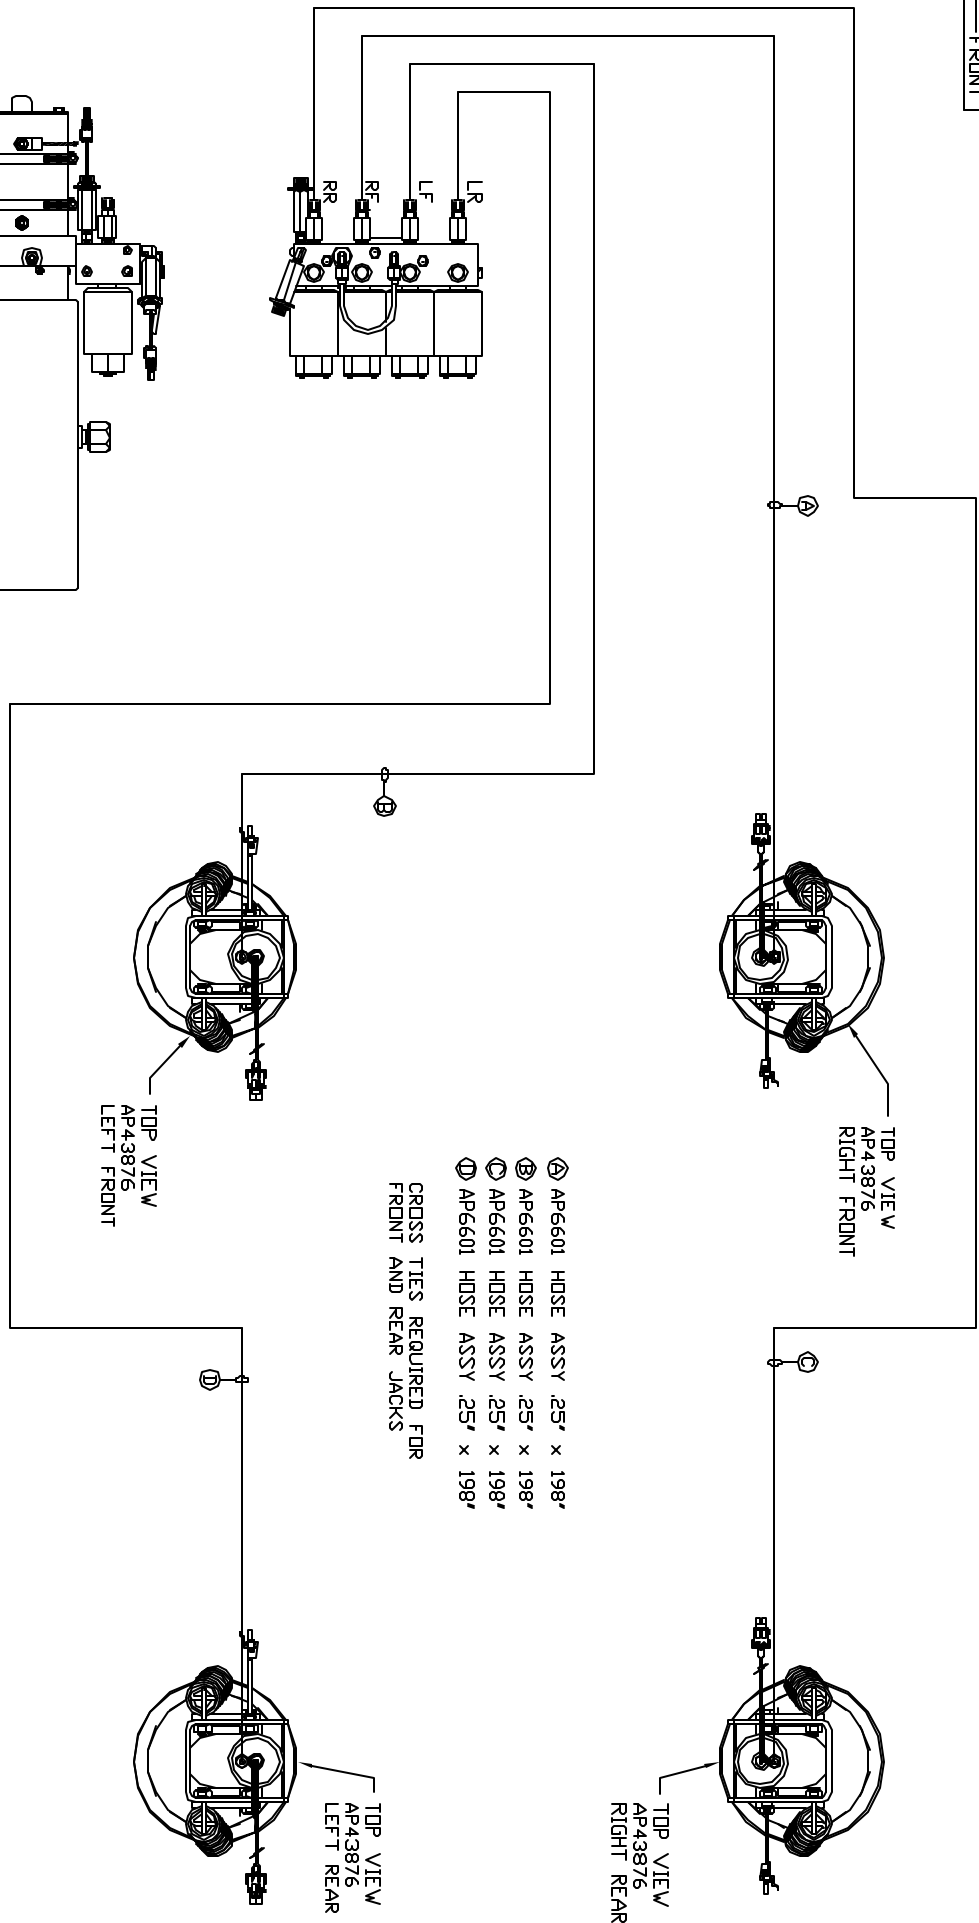

- Ⓐ AP6601 HOSE ASSY .25' x 198'
- Ⓑ AP6601 HOSE ASSY .25' x 198'
- Ⓒ AP6601 HOSE ASSY .25' x 198'
- Ⓓ AP6601 HOSE ASSY .25' x 198'

CROSS TIES REQUIRED FOR FRONT AND REAR JACKS

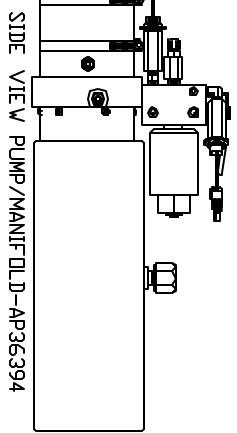

LOCATION AND ORIENTATION OF PUMP/MANIFOLD ASSEMBLY WILL DIFFER DEPENDING UPON DEM.

NOTE: INSTALLATION MUST CONFORM TO GOOD SHOP PRACTICES, SAE STANDARDS, RVIA STANDARDS, AND OTHER APPLICABLE STANDARDS.

NO.	DATE	REVISION

THE INFORMATION DISCLOSED IN THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE DISCLOSED OR USED IN ANY MANNER WHICH WILL BE DETRIMENTAL TO THE IAH CORPORATION

HWH 1-80 EXIT 267 SOUTH
 RT 1 MOSCOW, IDWA 52760
 SCALE 1:6 DATE 06DEC13 DRAWN BY .
HYD CONN DIAGRAM
 TAYLOR COMM. DRAWING NUMBER MP70721